



Introduction

Security System (DSS) Professional is designed for centralized security management. It enhances hardware performance and provides centralized video monitoring, access control, video intercom, alarm controller, POS, radar and AI features, such as face recognition, automatic number plate recognition, and video metadata.

Whether you are a small business with a few cameras, or a global business spread across the globe with over 20,000 cameras, DSS Professional is the right solution for you. Even if your needs change in the future, you can easily scale, upgrade or add functionalities to DSS Professional so that your needs are met. Build your security management system on a solid foundation with DSS Professional.

Features



Scalable Design, Easy to Grow

With distributed deployment, you can easily expand the supported channels to 20,000 and central storage capacity to 4 PB. The multi-site function allows you to incorporate multiple DSS platforms into one, and conveniently show their information on one PC client. You can access live and recorded videos, real-time and historical events, and more.



AI-Powered Applications, Proactive Security

DSS Professional integrates various AI capabilities that devices have, such as face recognition, automatic number plate recognition, and video metadata. You will be notified immediately when the target you are interested in appears, allowing you or security personnel to take necessary security measures.



Highly Available Technology, More Stable

With hot standby and N+M redundancy, DSS Professional ensures that your business will not be interrupted by failed servers.




Customized Services, Enhanced Competitiveness

We offer services for you to build DSS Professional into your own platform, allowing it to fully suit your needs and give you a competitive edge in the market.

1

System Architecture

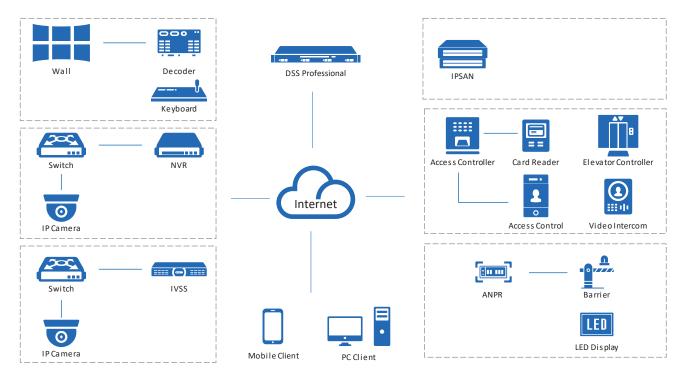

Main Functions

Monitoring Center

Live View

With its easy to use live view, you can both customize and control how you view videos in real time. The layout can also be configured to display videos in different sizes, enabling you to give priority to important areas by placing then in larger windows. You can also remotely control certain devices to perform various actions such as talking to people through the camera, and unlocking the barrier of a turnstile to grant access to people. If an emergency occurs, manual recording is just a click away, so that you can quickly save that particular part of the video for evidence.

Playback

The playback function allows you to play recorded videos stored on the server and devices in multiple windows. To help you efficiently wade through tons of videos, you can play them 64X faster than the normal speed, skipping parts that you are not interested in, or you can slow them down to 1/64X, to focus on important sections. To control the data in the videos, you can add tags to mark relevant content, and you can even lock them to prevent them from being overwritten when the disk space is full. The filter function can also be very helpful when you only need to deal with a specific type of video, or a type of target that appeared in one or more areas.

Video Wall

Video wall is used to display videos on a large screen that consists of many smaller screens. Highly customizable, you can not only configure the layout of the video wall, but you can also display recorded videos and real-time videos to zero in on important details in the video. With the task function, you can schedule videos from different channels to be displayed on the video wall at specified times or in a loop.

2

Map

The map is a very useful function that allows you to keep track of devices and events through their location information. With it, you can mark a device and immediately know the location of an event when the device triggers an alarm and flashes red on the map. You can also add submaps to different areas. For example, a plan view of a public square can be added to a map to reveal the exact location of people who are inside the public square.

Group Talk

The real-time location of MPT devices are shown on the map, making it easy for dispatchers to effectively send officers and resources to address issues such as a burglar or duress alarm going off in a building. Dispatchers can start a group talk and engage in a real-time conversation with the officers who were assigned the task to efficiently guide them through the process.

DeepXplore

Powered by AI technology, you can easily search for targets, look for records on them and even generate tracks on their movement to observe their whereabouts through setting simple search conditions. To gain an overview on the target, you can organize information on them into a case and generate a report.

Event Management

You can monitor and process over 200 types of alarms right from the event center, while it continuously generates statistics. To give you a clear picture of what is happening in your area, the alarm center also displays a variety of useful information such as the number of alarms that were processed, and the type of alarms that are triggered most frequently. Highly flexible, you also have a selection of predefined alarm types available to you, and the option to not only create your own alarm, but to also manually trigger it to take snapshots and send emails for important events.

Maintenance Center

By just visiting one page, you can stay up to date with information on alerts, devices, servers and more to instantly recognize issues such as offline devices and abnormal servers. In the maintenance center, switches can also be conveniently configured and details, such as their network topology, can also be viewed. Scheduled reports are also sent based on the information collected to give you a full picture of how your system is running. Updating is also a breeze, as you can easily update multiple devices in batches when new versions are available.

Access Management

Access Control

Doors and lifts in different areas can all be effectively controlled for added security. A zone-based management model is used, which maintains maps for each zone to make it easy for you to locate access points. Through the use of access rules, you can quickly grant and deny access to people with great efficiency, strengthening the security of each area. From the access panel, you can also view and control the channels of doors and lifts at the same time across different zones to manage access.

♦ Video Intercom

All video intercom devices can be managed directly through one easy-to-use interface that offers two-way communication and remote access control. Through the interface, you can secure access to your premises, and

3

receive calls and emergency reports directly from people on-site. Building management is also very convenient, as you can send group notices to all the indoor monitors, keeping people informed of important events, such as scheduled power outages.

Visitor

DSS Professional offers a complete process to manage visitors, including appointment, registration, access permission authorization, and ending visit with all permissions canceled. A complete, detailed record of all visits is available for your review at any time.

Intelligent Analysis

To help build your profits and strengthen your services, the platform provides invaluable information on people on your premises through performing a variety of intelligent analysis and generating heat maps. Through it, you can know the number of people in an area at any given time, where they frequent the most, and precisely when the highest peaks in numbers occurs.

Parking Lot Management

From just one platform, you can remotely manage all the devices in your parking lots, such as parking space detectors and ANPR devices, to guide vehicles in an orderly fashion. The visualization function makes it easier for you to drag and drop devices on the visual map of your parking lots. The platform also offers a vehicle search system for vehicle owners to use when they are leaving, to help them quickly locate their transport. Insightful information is also provided in the form of statistics on an easy-to-use dashboard, keeping you up to date on key activities taking place in your parking lots to help you effectively manage them.

Intelligent Inspection

Both your properties and equipment are effectively monitored through our user friendly platform. The settings can even be customized to meet your particular needs for item inspection. Inspection plans can also be scheduled to capture images and monitor temperatures with HD cameras and temperature imaging technology, to help you quickly identify equipment failures and safety hazards when detected. This type of intelligent inspection greatly improves upon manual methods, increasing the accuracy and efficiency of inspection, while reducing labor cost.

Synthesis

DSS Professional is friendly with other systems in your infrastructure. By developing bridges, linkage actions can be flexibly configured on DSS Professional based on the events that are triggered on other platforms. What's more, DSS professional can synchronize access control records with the databases from other platforms.

■ System Requirements

	Server		PC Client	
	Recommended	Minimum	Recommended	Minimum
СРИ	Intel Xeon Silver 4114 @2.2 GHz 10 Core Processor	Intel Xeon E-2224 @3.4 GHz, 8M cache	Intel® Core i7-11700 @2.50 GHz	Intel® Core i5-9500 @3.00 GHz
Memory	16 GB	8 GB	16	5 GB
System Disk	1TB 7200 RPM SATA 6 Gbps 512n 3.5 in Hot-plug Hard Drive	1 TB 7200 RPM SATA Entry 3.5 in Cabled Hard Drive		-
Storage Disk	7200 RPM Enterprise Class HDD 1 TB, 500 GB free space for DSS		200 GB free space for DSS Client	100 GB free space for DSS Client
Graphics Card	-		NVIDIA® GeForce® RTX 3060	Intel® UHD Graphics 630
Ethernet Port	4 Ports@1000 Mbps	2 Ports@1000 Mbps	1000) Mbps
Operating System	Microsoft® Windows Server 2019 Standard (64-bit) Microsoft® Windows Server 2022 Standard (64-bit) Microsoft® Windows 10 20H2 Pro (64-bit) Microsoft® Windows 11 21H2 Pro (64-bit)		Microsoft® Windows 10 20H2 Pro (32-bit) Microsoft® Windows 10 20H2 Pro (64-bit) Microsoft® Windows 11 21H2 Pro (64-bit) Microsoft® Windows Server 2019 Standard (64-bit) Microsoft® Windows Server 2022 Standard (64-bit)	
Languages	Arabic, Bulgarian, Czech, Danish, English (United States), Finnish, French, German, Hebrew, Hungarian, Italian, Japanese, Korean, Macedonian, Polish, Brazilian Portuguese, Russian, Simplified Chinese, Spanish, Thai, Traditional Chinese, Turkish, Ukrainian, Vietnamese.			

■ Performance Specification

Organization, Role and User		
Organizations	10 levels; 999 organizations in total	
Roles (User Permission)	500	
Users	200 online users and 2,500 total users	
Roles per User	32	
Users for VDP Mobile App	500 online users and 5,000 total users	

Recording Plan		
General Recording Plans	3,000	
Motion Detection Recording Plans	3,000	
Video Retrieval Plans	3,000	
File Retrieval Plans	3,000	

Event	
Event Sources for Event Rules	3,000
Combined Event Rules	100
Combined Events	1,000

DSS Professional Datasheet

Мар	
Hierarchies	8
Size of Offline GIS Map Package	500 MB
Raster Maps	256
Submaps per Map	32
Maximum Size of Raster Map	15 MB
Raster Map Resolution	8,100 × 8,100
Resources on GIS Map	300
Resources per Raster Map	300

Person and Vehicle Management		
Person and Vehicle Groups	999	
Group Levels	10	
Persons	300,000	
Cards	600,000	
Faces	300,000	
Fingerprints	600,000	
Vehicles	50,000	

Face and Vehicle Watch Lists ^①		
Face Watch Lists	50	
Vehicle Watch Lists	32	
Total Faces	300,000	
Faces per Face Watch List	50,000	
Vehicles per Vehicle Watch List	50,000	

Intelligent Analysis	
People Counting Groups	30
People Counting Rules per Group	20

Parking Lot Management	
Vehicle Groups	32
Entrances and Exits	60
Parking Lots	16
Entrance and Exit Points	60
License Plates per Reserved Parking Space	10,000
Parking Space Detectors per Parking Lot	500

DSS Professional Datasheet

Parking Space per Parking Lot	1,500
Parking Available Displays per Parking Lot	30
Image Size per Layer	15 MB
Resolution per Layer	8,100 × 8,100
Total Layers	128
Layers per Parking Lot	16
Resources per Layer (Parking Spaces Not Included)	600
Parking Spaces per Layer	1,000
Vehicle Search Rules	32

Access Control	
Persons for Door Access Rules	30,000 (1 password, 2 face images, 3 fingerprints, and 5 cards for each person)
Zones	256
Door Access Rules	500
Public Passwords	1,500
Lift Access Rules	300
Persons for Lift Access Rules	20,000

Visitor	
Appointments in Progress	10,000

Video Intercom	
Rooms	5,000
Persons per Room	10
VDP Accounts per Room	5

Synthesis	
Bridges	5
Incoming Trigger Events	100
Incoming Trigger Sources	500

Group Talk	
Groups	30
Users per Group	100

Intelligent Inspection	
Inspection Organizations	1,000
Levels of Inspection Organizations	10
Inspection Objects	10,000
Inspection Points	10,000
Inspection Points per Organization	1,000
Inspection Plans	1,000
Inspection Points per Inspection Plan	100

Notification Center	
Messages	1,000

Data Storage	
Event Records	20,000,000
Alert Records	5,000,000
Face Recognition Records	20,000,000
ANPR Records	5,000,000
Metadata Records	5,000,000
Access Records	5,000,000
Video Intercom Records	5,000,000
Visitor Records	5,000,000
Entrance Records	5,000,000
Exit Records	5,000,000
Parking Records	5,000,000
Inspection Records	5,000,000
Historical Count Records	5,000,000
In Area Statistical Records	5,000,000
Heat Map Records	5,000,000
MPT Records	5,000,000
Operator Logs	5,000,000
Service Logs	5,000,000
Independent Data Deployment-Event Records	30,000,000
Independent Data Deployment-Face Recognition Records	30,000,000
Independent Data Deployment-ANPR Records	30,000,000
Independent Data Deployment-Video Metadata Records	30,000,000

■ Server Specification

The following specifications are obtained in servers with recommended system requirements.

Sub Servers per System Devices® Auto-Registered Devices Video Devices and Channels Devices Added by Hikvision Protocol Devices Added by ONVIF Protocol ANPR Channels Sub Servers - 10 servers 2,000 devices 1,000 devices 1,000 devices; 2,000 channels 10,000 devices; 20,00 channels 5,000 devices; 20,00 channels 10,000 devices; 20,00 channels 5,000 devices; 20,00 channels 10,000 devices; 20,00 channels	000 channels	
Total Devices Auto-Registered Devices 1,000 devices; 2,000 channels 1,000 devices; 2,000 channels 1,000 devices; 2,000 channels 5,000 devices; 20,00 P2P Devices Devices Added by Hikvision Protocol 1,000 devices; 2,000 channels 10,000 devices; 20,00 ANPR Channels 5,000 channels 5,000 channels 5,000 channels	000 channels	
Auto-Registered Devices 1,000 devices 10,000 devices Video Devices and Channels 3 1,000 devices; 2,000 channels 10,000 devices; 20,000 devices; 20,000 devices; 20,000 devices; 20,000 devices Added by Hikvision Protocol 500 devices; 2,000 channels 5,000 devices; 20,000 devices P2P Devices 32 devices Devices Added by ONVIF Protocol 1,000 devices; 2,000 channels 10,000 devices; 20,000 channels 5,000 channels 5,000 channels	000 channels	
Devices Added by Hikvision Protocol P2P Devices Devices Added by ONVIF Protocol ANPR Channels 5,000 devices; 2,000 channels 5,000 devices; 20,00 1,000 devices; 2,000 channels 10,000 devices; 20,000 channels 5,000 channels	000 channels	
P2P Devices 32 devices Devices Added by ONVIF Protocol 1,000 devices; 2,000 channels 10,000 devices; 20, ANPR Channels 500 channels 5,000 channels		
Devices Added by ONVIF Protocol 1,000 devices; 2,000 channels 10,000 devices; 20, ANPR Channels 5,000 channels 5,000 channels	000 channels	
ANPR Channels 5,000 channels 5,000 channels	000 channels	
Video Devices and Channels Face Recognition Devices and Channels 100 devices; 500 channels 1,000 devices; 5,00		
	0 channels	
Video Metadata Channels 500 channels 5,000 channels		
MPT Devices 100 devices 300 devices		
EEC Devices 64 devices		
Switches 64 devices 200 devices		
MDVR/MNVR 100 devices; 800 channels 1,000 devices; 8,00	0 channels	
Access Control Devices and Lift Control Devices 500 devices; 1,000 channels 1,500 devices, 3,00	0 channels	
Access Control Devices 500 devices; 1,000 doors 1,500 devices, 3,00	0 doors	
Access Control Devices Lift Control Devices 500 devices; 1,000 channels 1,500 devices, 3,00	0 channels	
VDP 2,000 devices	2,000 devices	
Alarm Controllers 100 devices; 1,000 zones 500 devices; 5,000	zones	
Alarm Devices 1,000 devices; 2,000 channels 10,000 devices; 20,	000 channels	
EAS Alarm Channels 2,000 channels 20,000 channels		
Security Screening Machines 20 devices 200 devices		
Security Screening Devices Walk-through Metal Detectors 60 devices 600 devices		
Radars 20 devices		
Parking Space Detectors 500 devices; 1,500 parking spaces 2,000 devices; 6,00	00 parking spaces	
Parking Lot Devices Parking Space Available Displays 150 displays 600 displays		
People Counting Channels 100 channels 300 channels		
Intelligent Analysis Heat Map Channels 100 channels 300 channels		
IP Speaker IP Speakers (ONVIF) 1,000 devices 10,000 devices		
Sites 100 sites		
Multi-site Devices per Site 10,000 devices; 20,000 channels		
Total Devices 10,000 devices; 20,000 channels	10,000 devices; 20,000 channels	
Others POS Channels 100 channels 300 channels		

Media Transmission Server	Total Incoming Bandwidth	600 Mbps	6,000 Mbps
	Incoming Video Bandwidth	600 Mbps	6,000 Mbps
	Incoming Picture Bandwidth	200 Mbps	2,000 Mbps
	Total Outgoing Bandwidth	600 Mbps	6,000 Mbps
	Outgoing Video Bandwidth	600 Mbps	6,000 Mbps
Media Transmission Server	Outgoing Picture Bandwidth	200 Mbps	2,000 Mbps
Media Transmission Server	Total Storage Bandwidth	600 Mbps	6,000 Mbps
	Video Storage Bandwidth	600 Mbps	6,000 Mbps
	Picture Storage Bandwidth	200 Mbps	2,000 Mbps
Playback, Storage and Download	Prerecording Bandwidth for Alarm Recordings	400 Mbps	4,000 Mbps
Playback, Storage and Download	Maximum Capacity of Central Storage (IPSAN)	400 TB	4 PB
	Total Events [®]	300 per second	600 per second
Event [®]	Storage of Events or Alarms without Pictures [®]	300 per second	600 per second
	Alarms with Snapshots (Stored on Devices)	300 per second	600 per second
	Access Control Events	300 per second	600 per second
	Combined Events	100 pe	r second

① All the devices together cannot contain more than 10 million faces when the number of faces in the watch lists are multiplied by the number of devices. For example, if a face watch list with 200,000 faces is sent to 40 devices, you can only send another face watch list with 100,000 faces to 20 devices. Or, you can send a list with 50,000 faces to 20 devices and another list with 100,000 faces to 10 devices.

- ② The maximum number of devices, including IPC, NVR, and ITC, cannot exceed 2,000 for a single server, and 20,000 for multiple servers.
- (3) When adding video channels and video devices, such as IPC, NVR and ITC, to the platform, you cannot add more than 1,000 devices, 2,000 channels for a single server, and 10,000 devices, 20,000 channels for multiple servers.
- ④ These values represent the maximum number of events that can be triggered at the same time. The numbers are measured based on the peak concurrency tests that were carried out 3 times a day. Each test lasted 20 minutes, with 30% of the peak concurrency being applied to the remaining day.
- (5) The maximum number of events that can be triggered at the same time largely depends on the concurrent write capability of the database.
- (6) For events with snapshots, you must take into account the ability for disks and servers to concurrently write images at the same time. For servers it is 200 Mbps.

DSS Mobile Client Main Functions

DSS Agile 8

Live View

Even when you are away from your computer, you can also ensure the safety of your area right on DSS Agile. You can watch the real-time videos remotely from up to 16 channels at the same time with 3 stream types for you to choose according to the status of your mobile network. PTZ control is also supported so that you can cover most of the area. When anything of interest happens, you can take snapshots or recordings as evidence that stores on your phone, or send a voice message to deter unwanted activities.

Playback

Videos stored on devices or the server can both be played up to 8X faster or 1/8X slower on DSS Agile. You can also use the manual recording function to record important content and save it to your phone.

Access Control

With DSS Agile, you can remotely monitor and operate all access control devices. For example, you can open a door for someone who has a proven identity, or set a door to be always closed so that no one can access.

Target Tracking

For suspicious activities, you can locate targets directly in DSS Agile by searching for face recognition records from a period, uploading a face image of a specific target, or searching for capture records of people, non-motor vehicles, and motor vehicles by features.

Event

You can receive and process various types of alarms. You can also receive alarms when DSS Agile is not running with a subscription button.

Video Intercom

You can make calls to and receive calls from master stations, indoor monitors and door stations. After subscribing to offline calls, you will still receive calls even when the App is not running. Also, a complete record of incoming and outgoing calls ensure that you will not miss any important message.

Alarm Control Panel

Alarm controllers can be remotely operated through DSS Agile to protect areas. You can arm and disarm areas, bypass and isolate zones, display the status of areas and zones in real-time, and filter the status of areas and zones to display information you are specifically interested in.

File Management

Snapshots and videos stored on devices or the server can be managed by deleting them, exporting them to albums, and more. Video downloads can be automatically and manually paused, saving you time from redownloading them when there are connection issues.

DSS Agile VDP

Visitor Management

You can easily manage visitors by registering their information and generating visitor passes with necessary access permissions. When they arrive, they can use the passes to gain access to where you are. DSS Agile VDP will log when visitors begin and end their visits.

Intercom Monitoring

When guests arrive, they can call you on the door station or you can verify their identities through the live video. After confirming they are who you are expecting, you can remotely open the door for them directly on DSS Agile VDP. If you spot any unwanted activities, tap and call the management center to report an emergency.

Message Center

The unlock records and alarm messages on the indoor monitor are fully accessible on DSS Agile VDP, allowing you to identify potential threats and ensure the safety of your residence.

■ DSS Mobile Client Requirements

	iOS	Android
Model	iPhone 5S or later	-
RAM	-	2 GB and above
Resolution	-	1280 × 720 or higher
Operating System	iOS 10.0 or later	Android 5.0 or later
Language	Arabic, English (United States), French, Russian, Simplified Chinese	